

**Lamp Posts
& Accessories**

WAVE
LIGHTING

WAVE

WAVE WAVE WAVE WAVE WAVE

877.870.WAVE (9283) • www.wavelighting.com

Lamp Posts & Accessories

DIRECT BURIAL RESIDENTIAL LAMP POSTS

- Fits Most Standard 3" Post Top Fixtures
- Textured Powdercoated Aluminum
- Crossarm Included Unless Otherwise Specified
- Includes Inlet Hole
- Made In The USA



S11T

See page 10

POST LENGTH	SUGG. BURIAL DEPTH
7'	18"
8'	18"
10'	24"
12'	24"
14'	30"


GUIDE: 295-320NCA-BK

Dimensions: O.D. = 2.950", I.D. = 2.850", Wall = .050"

ITEM #	OPTION	COLOR
295-7' Post	C-Conv. Outlet (338)	BK-Black
293-8' Post	320-Ezee Change Photo Control	WH-White
294-10' Post	NCA-No Crossarm	BZ-Bronze

NOTE: Crossarms available in black & white with gold balls, bronze posts ship with black crossarm. Posts with Crossarm, Photo Control, or Convenience Outlet come pre-punched for installation. Minor assembly required.

PUNCH LOCATIONS (Side View)



BOLLARD & CUSTOM LENGTH POSTS (348) AVAILABLE ON Page 55

BK-BLACK

WH-WHITE

BZ-BRONZE



7'
8'
10'

7'
8'
10'

SAFETY NOTE: Selecting posts and electrical accessories for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.

2420

Decorative Base
See page 56




Specifications subject to change without notice.

CAST ALUMINUM POST & BASE COMBINATION

- Fits Most Standard 3" Post Top Fixtures
- 2 Piece Snap Together System, No Tools Required
- Constructed of Sturdy Cast Aluminum
- Available in Black Only

GUIDE: C6P2-BK

ITEM #	COLOR
C6P2-6'	BK-Black
C8P2-8'	
C10P2-10'	




Anchor Bolt 3/8" x 7"

6'

C6P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 6'

Base Dimensions:
H = 21", W = 10 1/4"





Anchor Bolt 3/8" x 12"

8'

C8P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 8'

Base Dimensions:
H = 28 1/2", W = 11 5/8"
2"x4" Hand Hole

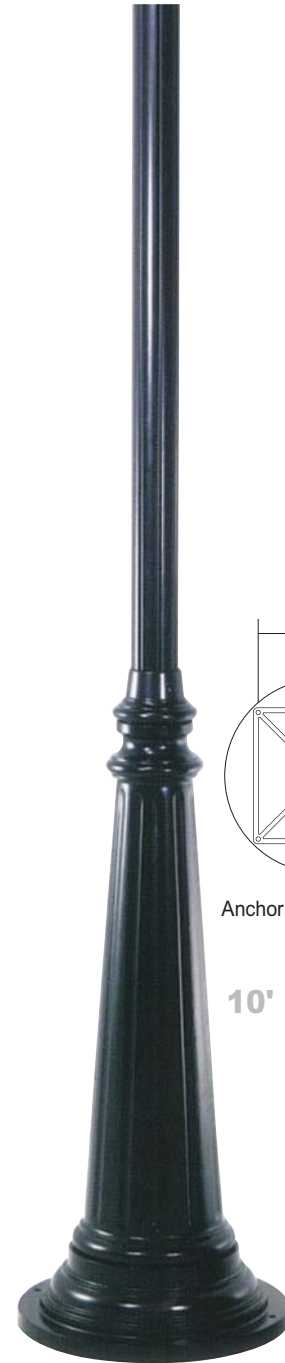

Anchor Bolt 3/8" x 12"

10'

C10P2-BK

Post Dimensions: O.D. = 3"
I.D. = 2.8", Wall = .100", L = 10'

Base Dimensions:
H = 37", W = 16 5/8"
2"x4" Hand Hole

NOTE: Includes anchor bolts and templates. Post and Base are two piece interlocking system that may ship separately.

SAFETY NOTE: Selecting posts for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting these items is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post or electrical accessory without getting such assistance, you do so at your own risk.



Posts accommodate Photo Control 688. See page 55. Photo Controls sold separately.

Specifications subject to change without notice.

DIRECT BURIAL ALUMINUM LAMP POSTS



DIRECT BURIAL

Includes Inlet Hole

GUIDE: 2514-BK-320

Post Dimensions: O.D. = 2.950", Wall = .072"


ITEM #	COLOR	OPTION
2500-8'	BK-Black	C-Convenience Outlet
2510-10'	WH-White	320-Ezee Change Photo Control
2512-12'	BZ-Bronze	688-Button Photo Control
2514-14'		HH*-2"x4" Hand Hole

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 2512 & 2514 include Hand Hole unless otherwise specified.

SEE PAGE 52 FOR .125" WALL DIRECT BURIAL OPTIONS

DIRECT BURIAL

PUNCH LOCATIONS for 8', 10', & 12' Posts (Side View)

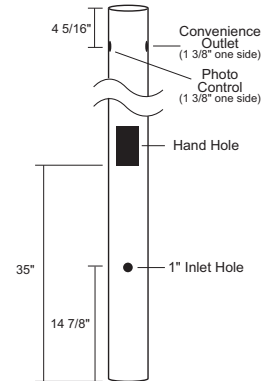


POST LENGTH	SUGG. BURIAL DEPTH
7'	18"
8'	18"
10'	24"
12'	24"
14'	30"

SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended.

Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

DIRECT BURIAL

PUNCH LOCATIONS for 14' Posts (Side View)

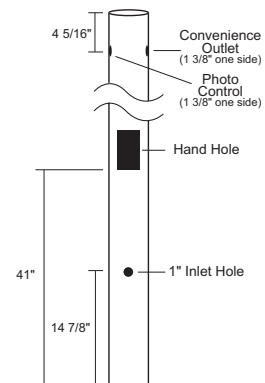



SURFACE MOUNT ALUMINUM LAMP POSTS

SURFACE MOUNT

Optional Flange Base & Cover

GUIDE: 2600-BZ

Post Dimensions: O.D. = 2.950", Wall = .072"

ITEM #	BASE TYPE	COLOR	OPTION
2600-8'	No Base or Cover	BK -Black	C -Conv. Outlet
2610-10'	ST -Standard Base	BZ -Bronze	320 -Ezee Change Photo Control
2612-12'	STV -ST Base w/Cover	WH -White	688 -Button Photo Control
	HD -Heavy Duty Base		HH* -2"x4" Hand Hole
	HDV -HD Base w/Cover		

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (**HH**) Hand Hole and ground lug. **2610** and **2612** include Hand Hole unless otherwise specified.

SEE PAGE 54 FOR COMPONENT OFFERINGS





2600-STV-BK



2600-HDV-BK

SURFACE MOUNT

PUNCH LOCATIONS (Side View)



Anchor Bolt M8 x 12"



Spun Aluminum Base Cover for **ST** Base (2410)



Die Cast Aluminum Flange base with anchor bolts for up to 12' x 2.950" O.D. Posts

ST-STANDARD BASE (2403)


GUIDE: 2690-BZ-HH

Post Dimensions: O.D. = 2.950", Wall = .125"

ITEM #	BASE TYPE	COLOR	OPTION
2690-10'	No Base or Cover	BK -Black	C -Conv. Outlet
2692-12'	ST -Standard Base	BZ -Bronze	320 -Ezee Change Photo Control
	STV -ST Base w/Cover	WH -White	688 -Button Photo Control
	HD -Heavy Duty Base		HH* -2"x4" Hand Hole
	HDV -HD Base w/Cover		

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (**HH**) Hand Hole and ground lug. **2690** and **2692** include Hand Hole unless otherwise specified.

SEE PAGE 54 FOR COMPONENT OFFERINGS



Anchor Bolt 3/8" x 12"



Spun Aluminum Base Cover for **HD** Base (2411)



Heavy Duty Aluminum Flange base with anchor bolts for up to 14' x 2.950" O.D. Posts



HD-HEAVY DUTY BASE (2405)

Lamp Posts & Accessories

3" COMMERCIAL LAMP POSTS

DIRECT BURIAL

Fits most 3" Post Top Fixtures
Includes Inlet Hole

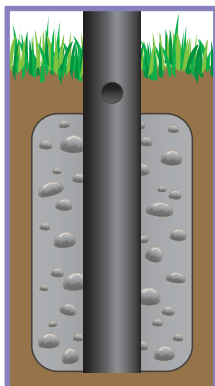

POST LENGTH	SUGG. BURIAL DEPTH
8'	18"
10'	24"
12'	24"
14'	30"

See Safety Note on page 53

SURFACE MOUNTED

Welded Flange with Optional Decorative Cover. Anchor bolts included.
Fits most 3" Post Top Fixtures



NO COVER **AB-AMERICANA** **DB-DECOR** **HX-HEXAGON** **RB-ROUND** **VB-VICTORIAN**
2 PIECE COVER (3BC1) 2 PIECE COVER (3BC6) 2 PIECE COVER (3BC2) 1 PIECE COVER (3BC9) 2 PIECE COVER (3BC3)

3" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
3588-8'	BK-Black	C-Conv. Outlet
3590-10'	BZ-Bronze	320-Ezee Change
3592-12'	WH-White	Photo Control
3594-14'		688-Button Photo Control
		HH*

3" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
3588F-8'	BK-Black	688-Button Photo Control
3590F-10'	BZ-Bronze	HH*
3592F-12'	WH-White	
3594F-14'		

3" ROUND ALUMINUM


.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
3688-8'	No Cover	BK-Black	C-Conv. Outlet
3690-10'	AB-American	BZ-Bronze	320-Ezee Change
3692-12'	DB-Decor	WH-White	Photo Control
	HX-Hexagon		688-Button Photo Control
	RB-Round Cover		HH*
	VB-Victorian		

3" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
3688F-8'	No Cover	BK-Black	688- Photo Control
3690F-10'	AB-American	BZ-Bronze	HH*
3692F-12'	DB-Decor	WH-White	
	HX-Hexagon		
	RB-Round Cover		
	VB-Victorian		





Round F-Fluted



3" Round 3" Fluted

PUNCH LOCATIONS (Side View)



Bolt Circle Pattern For 3" Posts
Anchor Bolt 1/2" x 12"

*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 3592, 3594, 3592F, 3594F, 3690, 3692, 3690F, and 3692F include Hand Hole unless otherwise specified.


Specifications subject to change without notice.

4" COMMERCIAL LAMP POSTS

Lamp Posts & Accessories

DIRECT BURIAL

Fits most 3" Post Top Fixtures
Includes Inlet Hole



SAFETY NOTES

All surface mount posts are supplied with welded mounting bases.

Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any and all codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.

See Suggested Burial Depth on page 52

4" ROUND ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590-10'	BK-Black	HH*
4592-12'	BZ-Bronze	
4594-14'	WH-White	

4" FLUTED ALUMINUM

.125 Wall Thickness

ITEM #	COLOR	OPTION
4590F-10'	BK-Black	HH*
4592F-12'	BZ-Bronze	
4594F-14'	WH-White	

SURFACE MOUNTED

Welded Flange & 3" Tenon with Optional Decorative Cover. Anchor bolts included.
Fits most 3" Post Top Fixtures



NO COVER



AB-AMERICANA
2 PIECE COVER
(4BC1)



DB-DECOR
2 PIECE COVER
(4BC6)



RB-ROUND
1 PIECE COVER
(4BC9)



VB-VICTORIAN
2 PIECE COVER
(4BC3)

4" ROUND ALUMINUM


.125 Wall Thickness

ITEM #	BASE TYPE	COLOR	OPTION
4688-8'	No Cover	BK-Black	HH*
4690-10'	AB-American	BZ-Bronze	
4692-12'	DB-Decor	WH-White	
4694-14'	RB-Round Cover VB-Victorian		

4" FLUTED ALUMINUM

.125 Wall Thickness



ITEM #	BASE TYPE	COLOR	OPTION
4688F-8'	No Cover	BK-Black	HH*
4690F-10'	AB-American	BZ-Bronze	
4692F-12'	DB-Decor	WH-White	
4694F-14'	RB-Round Cover VB-Victorian		



Round F-Fluted



4" Round 4" Fluted



Bolt Circle Pattern For 4" Posts
Anchor Bolt 3/4" x 18"


*To meet U.L. and N.E.C. standards, any post designed to be mounted over 8' above ground includes a 2" x 4" (HH) Hand Hole and ground lug. 4592, 4594, 4592F, 4594F, 4690, 4692, 4694, 4690F, 4692F, and 4694F include Hand Hole unless otherwise specified.

Specifications subject to change without notice.

CAST ALUMINUM & POLYCARBONATE POST TOP FITTERS

Die Cast Aluminum

Medium Base Porcelain Socket, 4Kv Upon Request
Specify Option: (MG) Mogul Socket, (G) GU24 Socket
Example: 1721-MG



1721 Black
1721B Bronze
1720 White

For 10"-16" Globes and
 11" x 17" Acorns with 5 1/4" Opening
 Powdercoated Finish
 I.D. = 3"




1724 Black
1724B BRONZE
1724W White

For 18" Globes with 5 1/4" Opening
 Powdercoated Finish
 I.D. = 3"

Polycarbonate

Medium Base Phenolic Socket
Specify Option: (G) GU24 Socket
Example: 1721P-G



1721P Black
1720P White


For 10"-16" Globes with 5 1/4" Opening
 I.D. = 3"



MOUNTING HARDWARE INCLUDED


Consult factory when ordering replacement fitters for fixtures with options: Refractors, Cylinders, etc.

FLANGE BASES & COVERS

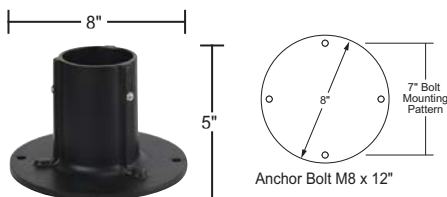

2403

Die Cast Aluminum Flange base, Powdercoated Finish
 Anchor Bolts Included, for 8' -12' x 2.950" O.D. Posts only
SPECIFY: Black, (B) Bronze, or (W) White

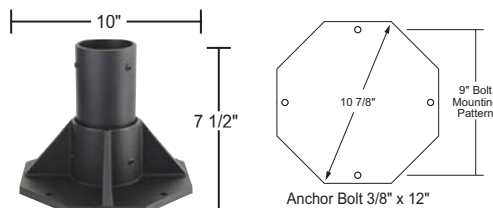

2405

Heavy Duty Aluminum Flange base, Powdercoated Finish
 Anchor Bolts Included, for up to 14' x 2.950" O.D. Posts
SPECIFY: Black, (B) Bronze, or (W) White



2410
 Spun Aluminum Base
 Cover for **2403**
 Powdercoated Finish
**SPECIFY: Black,
 (B) Bronze, or (W) White**



2411
 Spun Aluminum Base
 Cover for **2405**
 Powdercoated Finish
**SPECIFY: Black,
 (B) Bronze, or (W) White**

Slip-On Polymer Decorative Post Cover



2420

Polyethylene Decorative Slip On
 Base Cover for Standard 3" Post
 I.D. = 3"

SPECIFY: (B) Black (W) White
 No Hardware Included



NOTE: It is REQUIRED that a (2405) Flange Base be used on any surface mount post that utilizes multiple H.I.D. Post Brackets. Allen Set Screws, 3/8" x 12" Zinc Plated Anchor Bolts, and Template are included with Flange Base. Flange Post Base sold separately.

Specifications subject to change without notice.

POST FIXTURE ADAPTERS





348

3" Custom Length Post for use with **347** Surface Mount Adapter

SPECIFY:

Color: **(BK)** Black, **(WH)** White or **(BZ)** Bronze

Length: **(XX)** must be in 6" intervals
Example Part Number: **348-12**

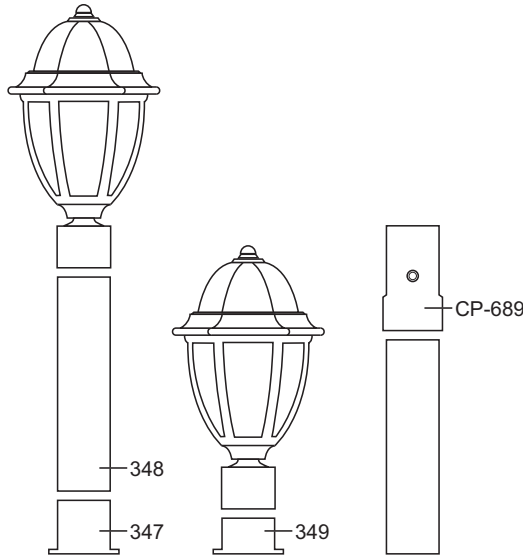

347

Pier Mount Adapter for use with **348** Stub Post

SPECIFY:

(BK) Black
(WH) White
(BZ) Bronze



349

Pier Mount Adapter for 3" Post Mount Fixtures

SPECIFY:

(BK) Black
(WH) White
(BZ) Bronze



CP-689

120V Photo Control (688 included) with Adaptor for 3" Posts


SPECIFY:
(BK) Black
(WH) White

POST ACCESSORIES



335

15" Aluminum Crossarm with Gold End Caps
3/4" Dia. mounting hole required
SPECIFY: Black or **(WH)** White



HH

2" x 4" Hand Hole Cover for 3" posts (includes mounting hardware)

SPECIFY: Black, **(B)** Bronze, or **(W)** White




HH4

2" x 4" Hand Hole Cover for 4" posts (includes mounting hardware)

SPECIFY: Black, **(B)** Bronze, or **(W)** White

PHOTO CONTROLS & OUTLETS



320

120V for 3" Post with Ezee Change Plug, 1 3/8" Dia. mounting hole required
Up to 300W Inc.,
39W Fluor., 100W H.I.D.


SPECIFY: Black or **(W)** White



688

120V Button Photo Control
1 1/16" Dia. mounting hole required
Up to 300W Inc.,
39W Fluor., 100W H.I.D.

SPECIFY: Black or **(W)** White

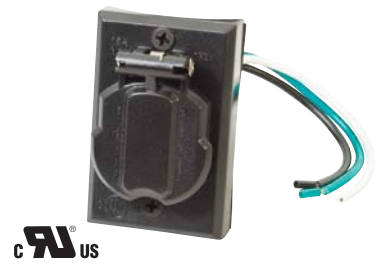

338

120V Grounded Convenience Outlet
1 3/8" Dia. mounting hole required

SPECIFY: Black or **(W)** White

SEE SAFETY NOTE ON PAGE 48

Specifications subject to change without notice.

CAST ALUMINUM BRACKETS



WB5

Contemporary Wall Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture
Max. Globe size: 16". I.D. = 3"
H = 6", W = 4 1/2", E = 12 1/2"
Powdercoated Finish
SPECIFY: (BK) Black
(WH) White or **(BZ)** Bronze



PB5

Contemporary Wall Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture. PB5-CAP Included. Designed to mount to 3" Posts with minimum .125 wall thickness
Max. Globe size: 16". I.D. = 3"
H = 9 1/2", W = 4 1/2", E = 16 1/2"
Powdercoated Finish
SPECIFY: (BK) Black
(WH) White or **(BZ)** Bronze



PB5-CAP

Cap for 3" Post I.D. = 3"
Powdercoated Finish
SPECIFY: (BK) Black
(WH) White or **(BZ)** Bronze



PB5-2

Contemporary Wall Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture. PB5-CAP Included. Designed to mount to 3" Posts with minimum .125 wall thickness
Max. Globe size: 16". I.D. = 3"
H = 9 1/2", W = 4 1/2", E = 29"
Powdercoated Finish
SPECIFY: (BK) Black
(WH) White or **(BZ)** Bronze



PB5-3

Contemporary Wall Bracket pre-wired w/20" pigtail for easy installation with 3" Post Mount Fixture
Designed to mount to 3" Posts with minimum .125 wall thickness
Max. Globe size: 14". I.D. = 3"
H = 9", W = 4 1/2", E = 29"
Powdercoated Finish
SPECIFY: (BK) Black
(WH) White or **(BZ)** Bronze

See Safety Note on page 55

CAST ALUMINUM FITTERS

4Kv Medium Base Porcelain Socket

Specify Option: (MG) Mogul Socket



1784

Style A Cast Fitter for Globes & Acorns with 8" Neck
H = 11", W = 10 1/4", I.D. = 3"



1785

Style B Fitter for Globes & Acorns with 8" Neck
H = 10 1/2", W = 10 1/4", I.D. = 3"

Powdercoated Finish - **SPECIFY: (BK)** Black, **(BZ)** Bronze or **(WH)** White

REFRACTORS



1000135

for Mogul Base Socket, Type V Distribution
H = 6 5/8", Dia. = 6 1/8", Top I.D. = 5 1/4", Bottom I.D. = 3 1/4"


Type III



1000137

for Mogul Base Socket, Type III Distribution
H = 6 5/8", Dia. = 6 1/8", Top I.D. = 5 1/4", Bottom I.D. = 3 1/4"

Type V



1000138

for Medium Base Socket, Type V Distribution
H = 4 7/8", Dia. = 4 3/4", Top I.D. = 4", Bottom I.D. = 3"

CAST ALUMINUM DECORATIVE BASE COVERS

FOR MOST 3" DIAMETER POSTS

Decorative Base Covers come as a two piece system, and can be installed over existing Surface Mounted Posts. **3BC9** and **4BC9** are one piece system.

FOR MOST 4" DIAMETER POSTS



3BC1

Dia.: 13 1/8"
Height: 24 1/8"



3BC2

Dia.: 11 1/2"
Height: 13 5/8"



3BC3

Dia.: 11"
Height: 26 3/8"



3BC6

Dia.: 11"
Height: 9 5/8"



3BC9

Dia.: 10"
Height: 3 1/2"
Top I.D.: 4 1/8"



4BC1

Dia.: 15"
Height: 27 5/8"



4BC3

Dia.: 12 1/8"
Height: 29"



4BC6

Dia.: 12"
Height: 9 5/8"



4BC9

Dia.: 11"
Height: 3 1/2"
Top I.D.: 5 3/8"

Powdercoated Finish - **SPECIFY: (BK)** Black, **(BZ)** Bronze or **(WH)** White


Posts sold separately.

Specifications subject to change without notice.

RESIDENTIAL REPLACEMENTS




LENSES & DIFFUSERS



**COLONIAL, SAXONY & VANGUARD
COMPANION SIZE LANTERNS
ACRYLIC**

*144-Clear Beveled Diamond 145-Amber Beveled Diamond
146-Clear Beveled 147-Frosted Beveled



**COMPANION SIZE
EVERSTONE™ LANTERNS
ACRYLIC**

1301724-Clear 1301725-Opal
*1301726-Frosted




**WALL PACK
EVERSTONE™
LANTERNS
ACRYLIC**

*1301727-Clear Prismatic
1301728-Opal



**VICTORIAN
LANTERN
ACRYLIC**

*1300371-Opal
1300372-Black



**COLONIAL, SAXONY & VANGUARD
FULL SIZE LANTERNS
ACRYLIC**

148-Clear Beveled 149-Frosted Beveled
*153-Amber Beveled Diamond 154-Clear Beveled Diamond



**FULL SIZE
EVERSTONE™ LANTERNS
ACRYLIC**

1301733-Clear 1301734-Frosted
*1301735-Opal



**LANTERN
CHIMNEY
GLASS**

*1300316-Frosted



**VICTORIAN
LANTERN
ACRYLIC**

*1300373-Clear Lens
with Trim Ring (sold assembled)

GLOBES & ACORNS W/5 1/4" NECKLESS OPENING



**CLEAR
POLYCARBONATE**
1256-12"
1456-14"
1656-16"
1856-18"

ACRYLIC
1066-10"
1266-12"
1466-14"
1666-16"
1866-18"



**OPAL
POLYCARBONATE**
1255-12"
1455-14"
1655-16"
1855-18"

ACRYLIC
1065-10"
1265-12"
1465-14"
1665-16"
1865-18"



**SMOKE
POLYCARBONATE**
1258-12"
1458-14"
1658-16"
1858-18"

ACRYLIC
1068-10"
1268-12"
1468-14"
1668-16"
1868-18"



**CLEAR PRISMATIC
POLYCARBONATE**
1859-18"

ACRYLIC
1069-10"
1269-12"
1669-16"
1869-18"



**CLEAR TEXTURED
POLYCARBONATE**
1756-For 2017CL
ACRYLIC
1766-For 8017CL

**OPAL TEXTURED
POLYETHYLENE**
1776-For 9017



**CLEAR TEXTURED
POLYCARBONATE**
2067-For 2018CL
ACRYLIC
2057-For 8018CL

**OPAL TEXTURED
POLYETHYLENE**
2077-For 9018

GLOBES & ACORNS W/4" FITTER NECK



ACRYLIC
0800407-8" Clear
0800408-8" Opal



ACRYLIC
0800411-12" Clear
0800410-12" Opal



**CLEAR TEXTURED
POLYCARBONATE**
1467-For S27S/T

SUGGESTED MAX WATTAGES

SIZE	ACRYLIC			POLYCARBONATE			POLYETHYLENE		
	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
10"	75W	18W	--	--	18W	--	--	--	--
12"	100W	26W	--	100W	26W	--	--	--	--
14"	150W	32W	--	150W	32W	--	--	--	--
16"	150W	32W	70W	150W	32W	70W	--	--	--
18"	150W	32W	100W	150W	32W	100W	--	--	--
ACORNS	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.	INC.	FLUOR.	H.I.D.
1756	--	--	--	150W	32W	70W	--	--	--
2067	--	--	--	150W	32W	70W	--	--	--


Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.

Specifications subject to change without notice.


COMMERCIAL REPLACEMENTS




ACRYLIC LENSES




C31T LANTERNS
ACRYLIC
C31TL-LENS-Opal
C31TP-LENS-Prismatic




C32T LANTERNS
ACRYLIC
C32TL-LENS-Opal
C32TP-LENS-Prismatic




C33T LANTERNS
ACRYLIC
C33TL-LENS-Opal
C33TP-LENS-Prismatic




C34T & C35T LANTERNS
ACRYLIC
C34TF-LENS-Frosted



C36T LANTERNS
ACRYLIC
C36TC-LENS-Clear
C36TL-LENS-Opal



C37T LANTERNS
ACRYLIC
C37TC-LENS-Clear
C37TL-LENS-Opal



C59T LANTERNS
ACRYLIC
C59TF-LENS-Frosted

8" FITTER NECK OPENING GLOBES

24", 27", 30" & 36" Globes Available
 Contact Sales with Questions



CLEAR

POLYCARBONATE

1856-8N-18"
2056-8N-20"

ACRYLIC
1866-8N-18"
2066-8N-20"



OPAL

POLYCARBONATE

1855-8N-18"
2055-8N-20"

ACRYLIC
1865-8N-18"
2065-8N-20"



SMOKE

POLYCARBONATE

1858-8N-18"
2058-8N-20"

ACRYLIC
1868-8N-18"
2068-8N-20"



CLEAR PRISMATIC

POLYCARBONATE

1859-8N-18"
2059-8N-20"

ACRYLIC
1869-8N-18"
2069-8N-20"

SUGGESTED MAX WATTAGES

SIZE	ACRYLIC		POLYCARBONATE	
	INC.	H.I.D.	INC.	H.I.D.
18"	150W	100W	150W	250W
20"	150W	150W	150W	250W
ACORNS	INC.	H.I.D.	INC.	H.I.D.
0801390	--	--	150W	250W
0801391	--	--	150W	250W
0801392	--	--	150W	250W
3467	--	--	150W	250W

Suggested Max Wattages is for use as a general reference chart only. No warranty or guarantee is expressed or implied, as product suitability is determined by installation.

8" FITTER NECK OPENING ACORNS



CLEAR TEXTURED
POLYCARBONATE
3467

Acorn with 8" Necked Opening for C75TC and C76TC Fixtures



CLEAR TEXTURED
POLYCARBONATE
0801390*

Acorn with 8" Necked Opening for C83TC and C84TC Fixtures**



CLEAR TEXTURED
POLYCARBONATE
0801391*

Acorn with 8" Necked Opening for C85TF and C86TF Fixtures**



CLEAR TEXTURED
POLYCARBONATE
0801392*

Acorn with 8" Necked Opening for C77TF and C78TF Fixtures

* For Finial - **SPECIFY: (DR)** Drill Hole ** For Hood - **SPECIFY: (TR)** Trim Top For C91 and C92, **(TR2)** Trim Top For C93 and C94

Contact Sales for Acrylic Acorns in Clear, Opal & Frost

Specifications subject to change without notice.